


Concrete Line 106 | 162

design: 2017, Cezary Zadorożny

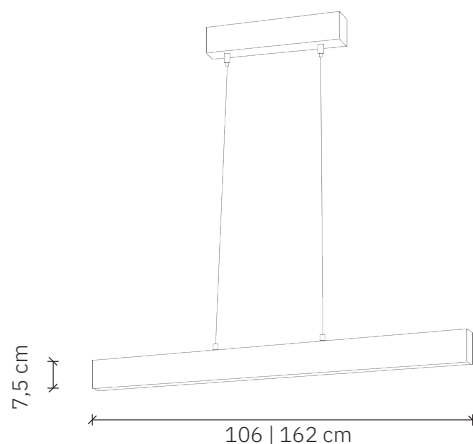

| | |
|---------------------|--|
| Model | Concrete Line 106 162 |
| Material | Concrete Steel |
| Finish | Coloured concrete, stainless steel elements |
| Dimensions | Concrete Line 106: L: 106 cm, H: 7,5 cm, D: 4 cm Concrete Line 162: L: 162 cm, H: 7,5 cm, D: 4 cm |
| Power supply | LED driver – external |
| Light Source | 106: LED module 18W, 162: LED module 28W, dimmable |
| Ceiling rose | Dedicated concrete ceiling rose with built-in driver |
| Weight | 106: 4kg; 162: 10kg |

User Manual:

- Gently remove the packaging.
- Before starting the installation, check if the product is complete and contains all elements without any damage.
- Check if all cables have undamaged insulation of wires and conductors.
- If any damage occurred during transport, report it to the seller.
- Turn off the power in the room where the lamp will be installed. Switch off the circuit breakers or the main power switch.
- It is recommended that the fixture be installed by an electrician or a properly trained person.
- The manufacturer does not provide wall plugs with the lamp. It is recommended to purchase plugs specifically designed for the mounting surface.
- Use only recommended bulbs to avoid overheating.
- It is recommended to install with gloves.

Maintenance Tips:

- Use a soft, dry, or slightly damp cloth to wipe off dust.
- Do not use any aggressive cleaning agents, as this may cause permanent stains or discoloration of the lamp.
- Keep the user manual.



Concrete Line 106 | 162

design: 2017, Cezary Zadorożny

| | |
|------------------------|--|
| Model | Concrete Line 106 162 |
| EAN code | 106: 5902730884576 ; 162: 5902730885733 |
| Producer | LOFTLIGHT Bottonova Sp. z o. o. |
| Design | Cezary Zadorożny |
| Type | Pendant lamp |
| Materials | Concrete Steel |
| Finish | Coloured concrete, stainless steel elements |
| Length | 106 cm 162 cm |
| Height | 7,5 cm |
| Depth | 4 cm |
| Standard cables length | 120 cm |
| Power supply | LED driver – external, 220-240V |
| Light source | 106: LED module 18W, 162: LED module 28W, dimmable |
| Light colour | 3000 K/4200 K |
| Color Rendering Index | 95 Ra |
| Light stream | 160: ~1800 lm; 162: ~2800lm |
| Ceiling rose | Dedicated concrete ceiling rose with built-in driver |
| Number of light points | 1 |
| Weight | 106: 4kg; 162: 10kg |
| IP protection degree | IP20 |

