


# Mariska

design: 2024, Cezary Zadorożny

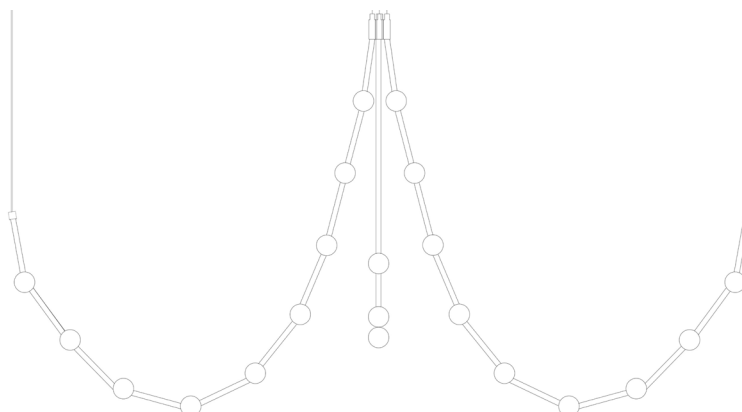

<b>Model</b>	Mariska
<b>Material</b>	Glass   Sandblasted glass   Aluminium
<b>Dimensions</b>	Ø ~300 cm, H: 135 cm (depending on the suspension)
<b>Diameter and number of balls</b>	7 cm, 54 pieces
<b>Arm length (LED tube)</b>	250 cm
<b>Power cord</b>	Steel power cables with transparent sheath
<b>Power supply</b>	24V, 400W
<b>Light Source</b>	Flexible LED tubes 16W
<b>Ceiling rose</b>	Dedicated ceiling rose
<b>Weight</b>	-
<b>Additional information</b>	The lamp is equipped with a driver, dimmer and steel mounting cables, possibility of customization (more on the website: <a href="http://www.loftlight.pl/en">www.loftlight.pl/en</a> ) half-pallet shipping

## User Manual:

- Gently remove the packaging.
- Before starting the installation, check if the product is complete and contains all elements without any damage.
- Check if all cables have undamaged insulation of wires and conductors.
- If any damage occurred during transport, report it to the seller.
- Turn off the power in the room where the lamp will be installed. Switch off the circuit breakers or the main power switch.
- It is recommended that the fixture be installed by an electrician or a properly trained person.
- The manufacturer does not provide wall plugs with the lamp. It is recommended to purchase plugs specifically designed for the mounting surface.
- Use only recommended bulbs to avoid overheating.
- It is recommended to install with gloves.

## Maintenance Tips:

- Use a soft, dry, or slightly damp cloth to wipe off dust.
- Do not use any aggressive cleaning agents, as this may cause permanent stains or discoloration of the lamp.
- Keep the user manual.



# Mariska

design: 2024, Cezary Zadorożny

Model	Mariska
EAN code	5902730889045
Producer	LOFTLIGHT   Bottonova Sp. z o. o.
Design	Cezary Zadorożny
Type	Pendant lamp
Materials	Glass   Sandblasted glass   Aluminium
Diameter	~300 cm
Height	135 cm
Ball diameter	7 cm
Number of balls	54
Arm length (LED tube)	250 cm
Power cord	Steel power cables with transparent sheath
Power supply	LED driver – external , 24V, 400W
Light source	1 module (tube) LED 16W
Light colour	3000 K
Light stream	~1600 lm
Color Rendering Index	90 Ra
Ceiling rose	Dedicated ceiling rose
Number of light points	Depends on number of LED tubes
Weight	-
IP protection degree	IP20

