


# Woodoo 1|2|3|4

design: 2024, Cezary Zadorożny

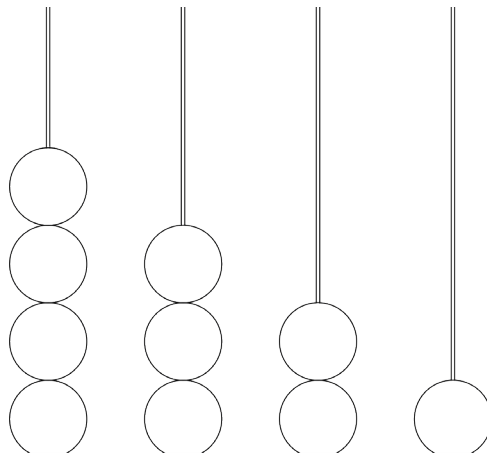

<b>Model</b>	Woodoo
<b>Material</b>	Wood
<b>Finish</b>	American walnut wood
<b>Ball diameter</b>	9 cm
<b>Height</b>	Depends on number of spheres
<b>Power cord</b>	Power cable in black silicone braid
<b>Power supply</b>	220-240V
<b>Light Source</b>	GU10 6 W LED, dimmable
<b>Ceiling rose</b>	Dedicated aluminum ceiling rose
<b>Weight</b>	-

## User Manual:

- Gently remove the packaging.
- Before starting the installation, check if the product is complete and contains all elements without any damage.
- Check if all cables have undamaged insulation of wires and conductors.
- If any damage occurred during transport, report it to the seller.
- Turn off the power in the room where the lamp will be installed. Switch off the circuit breakers or the main power switch.
- It is recommended that the fixture be installed by an electrician or a properly trained person.
- The manufacturer does not provide wall plugs with the lamp. It is recommended to purchase plugs specifically designed for the mounting surface.
- Use only recommended bulbs to avoid overheating.

## Maintenance Tips:

- Use a soft, dry, or slightly damp cloth to wipe off dust.
- Do not use any aggressive cleaning agents, as this may cause permanent stains or discoloration of the lamp.
- Keep the user manual.



# Woodoo 1 | 2 | 3 | 4

design: 2024, Cezary Zadorożny

Model	Woodoo 1   2   3   4
EAN code Woodoo 1	5902730889496
EAN code Woodoo 2	5902730889502
EAN code Woodoo 3	5902730889519
EAN code Woodoo 4	5902730889526
Producer	LOFTLIGHT   Bottonova Sp. z o. o.
Design	Cezary Zadorożny
Type	Pendant lamp
Material	American walnut wood
Finish	Raw solid wood
Sphere diameter	9 cm
Height	Depends on number of spheres
Power cord	Power cable in black silicone braid
Standard cord length	120 cm
Power supply	220-240V
Light source	GU10 6 W LED, dimmable
Light colour	3000K
Light stream	~600 lm
Color Rendering Index	95 Ra
Ceiling rose	Dedicated aluminum ceiling rose
Number of light points	1
Weight	-
IP protection degree	IP20

