
Stelar 49 | 68 | 107 | 145 | 183

Brass | Stainless Steel

RYSUNKI TECHNICZNE

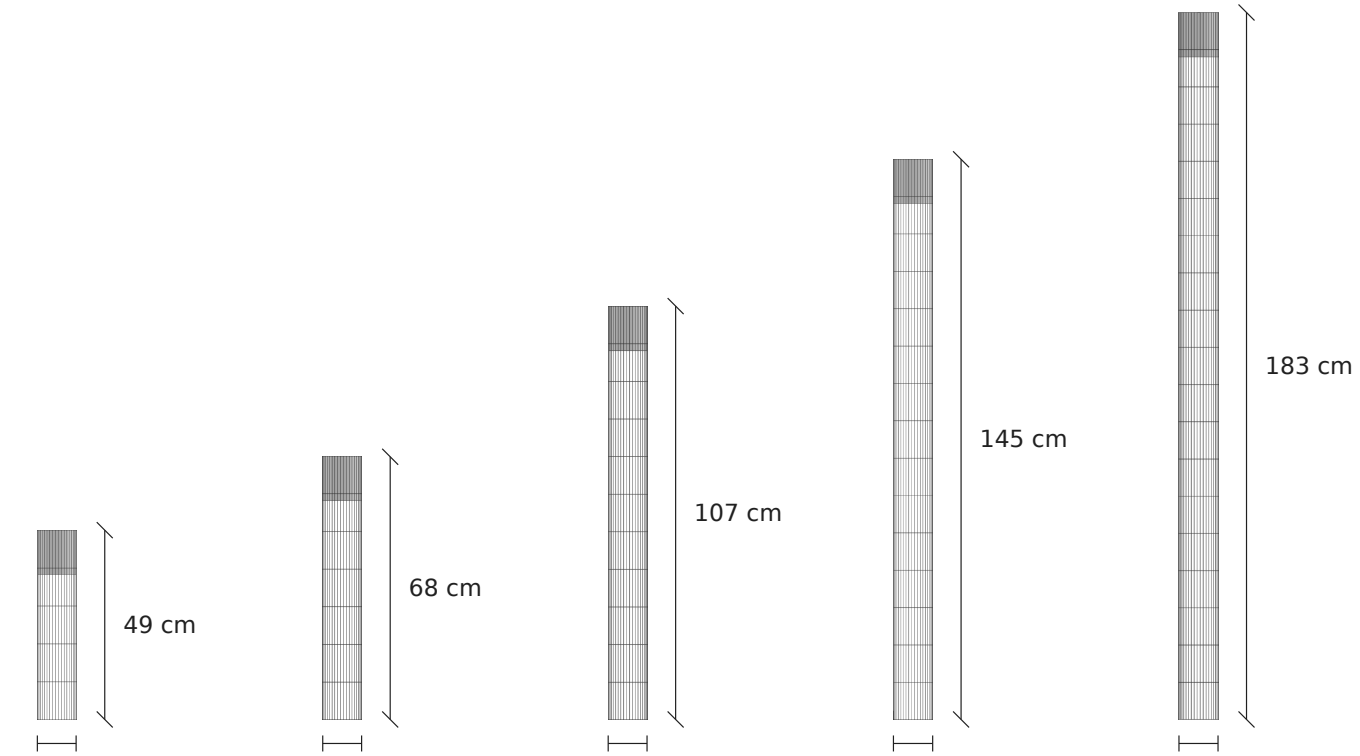

Stelar 49 **Stelar 68** **Stelar 107** **Stelar 145** **Stelar 183**

WSPÓLNE PARAMETRY

Typ oprawy	Lampa wisząca
Korpus	Aluminium
Siatka	Mosiądz (Brass) lub stal nierdzewna (Stainless Steel)
Średnica korpusu	Ø 10 cm

Możliwość tworzenia kompozycji

Kilka opraw na wspólnej podsufitce, w konfiguracji na zamówienie.

Liczba lamp, wysokości i rozmieszczenie dobierane do projektu.

Wymiary na rysunkach dotyczą oprawy bez zawieszenia.

Montaż

Zalecany montaż przez elektryka. Przed montażem odłącz zasilanie.

Czyszczenie

Czyść miękką, suchą ściereczką. Nie stosuj agresywnych środków czyszczących.

loftlight.pl/kontakt/
+48 797 093 003
sklep@loftlight.pl
info@loftlight.pl

Bottonova sp. z o.o.
Robotnicza 64, 53-608 Wrocław, Polska
NIP: 8971606867

Stelar 49 | 68 | 107 | 145 | 183

Brass | Stainless Steel

WARIANTY I KODY PRODUKTÓW

Wysokość korpusu	Średnia waga korpusu	Brass		Stainless Steel	
		SKU	EAN-13	SKU	EAN-13
49 cm	1,2 kg	BT136	5902730881360	BT135	5902730881353
68 cm	1,3 kg	BT132	5902730881322	BT133	5902730881339
107 cm	1,4 kg	BT931	5902730889311	BT925	5902730889250
145 cm	1,6 kg	BT932	5902730889328	BT926	5902730889267
183 cm	1,8 kg	BT933	5902730889335	BT927	5902730889274

Waga korpusu nie obejmuje podsufitki ani zasilacza.

DANE WSPÓLNE DLA WSZYSTKICH ROZMIARÓW

Producent	LOFTLIGHT | Bottonova sp. z o.o.
Projektant	Cezary Zadorożny
Typ	Lampa wisząca
Materiały	Aluminium; siatka z mosiądzu lub stali nierdzewnej
Średnica oprawy	10 cm
Źródło światła	Zintegrowany LED
Moc LED	24 W
Temperatura barwowa	3000 K
Strumień świetlny	2400 lm
Współczynnik oddawania barw (CRI)	≥ 90
Zasilanie	220–240 V
Stopień ochrony	IP20

WYPOSAŻENIE I STEROWANIE | 68, 107, 145, 183 cm

Linki zasilające	Stalowe, w przezroczystym oplocie; standardowo 120 cm
Zasilacz	LED, zewnętrzny
Podsufitka	Półkulista, aluminiowa, czarna, w zestawie
Ściemnianie w standardzie	Brak
Sterowanie opcjonalne	Casambi lub DALI, za dopłatą Konfiguracja i wycena po wcześniejszym uzgodnieniu


loftlight.pl/kontakt/
+48 797 093 003
sklep@loftlight.pl
info@loftlight.pl

Bottonova sp. z o.o.
Robotnicza 64, 53-608 Wrocław, Polska
NIP: 8971606867

Stelar **49 | 68 | 107 | 145 | 183**

Brass | Stainless Steel

TECHNICAL DRAWINGS

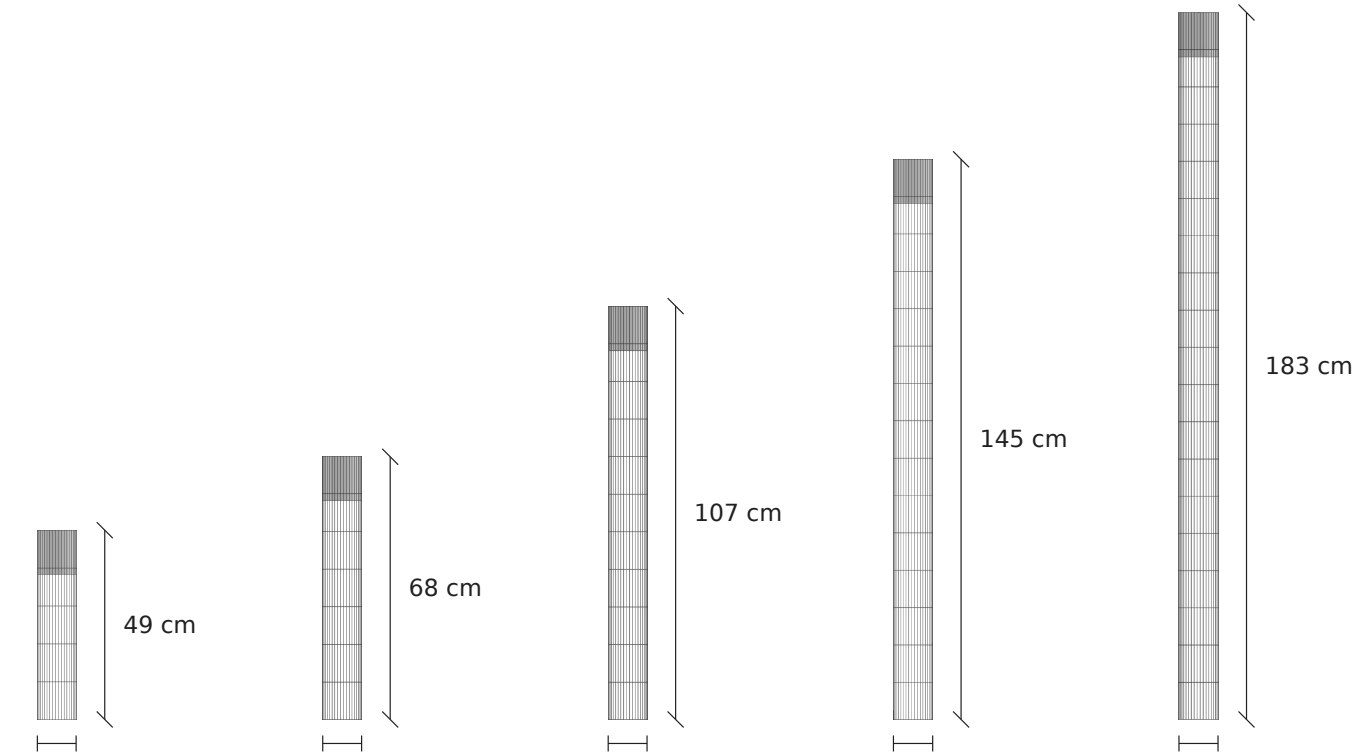

Stelar 49 **Stelar 68** **Stelar 107** **Stelar 145** **Stelar 183**

SHARED SPECIFICATIONS

Luminaire type	Pendant light
Body	Aluminium
Mesh	Brass or stainless steel
Body diameter	Ø 10 cm

Custom lighting compositions

Several luminaires on a shared canopy, configured to order.

The number of lights, heights and layout are tailored to the project.

Drawing dimensions refer to the luminaire body, excluding suspension.

Installation

Installation by an electrician is recommended.
Disconnect the power before installation.

Cleaning

Clean with a soft, dry cloth. Do not use harsh cleaning agents.

loftlight.eu/contact-us/
+48 501 431 561
export@loftlight.pl

Bottonova sp. z o.o.
Robotnicza 64, 53-608 Wrocław, Poland
Tax ID: 8971606867

Stelar 49 | 68 | 107 | 145 | 183

Brass | Stainless Steel

MODELS AND PRODUCT CODES

Body height	Average body weight	Brass		Stainless Steel	
		SKU	EAN-13	SKU	EAN-13
49 cm	1,2 kg	BT136	5902730881360	BT135	5902730881353
68 cm	1,3 kg	BT132	5902730881322	BT133	5902730881339
107 cm	1,4 kg	BT931	5902730889311	BT925	5902730889250
145 cm	1,6 kg	BT932	5902730889328	BT926	5902730889267
183 cm	1,8 kg	BT933	5902730889335	BT927	5902730889274

Body weight excludes the ceiling canopy and LED driver.

SPECIFICATIONS FOR ALL SIZES

Manufacturer	LOFTLIGHT | Bottonova sp. z o.o.
Designer	Cezary Zadorożny
Type	Pendant light
Materials	Aluminium; brass or stainless steel mesh
Luminaire diameter	10 cm
Light source	Integrated LED
LED power	24 W
Colour temperature	3000 K
Luminous flux	2400 lm
Colour rendering index (CRI)	≥ 90
Power supply	220–240 V
IP rating	IP20

EQUIPMENT AND CONTROL | 68, 107, 145, 183 cm

Power cables	Steel, with a transparent sheath; standard length 120 cm
LED driver	External
Ceiling canopy	Hemispherical, aluminium, black, included
Dimming as standard	No
Optional control	Casambi or DALI, at an additional cost Configuration and pricing agreed before ordering

loftlight.eu/contact-us/
+48 501 431 561
export@loftlight.pl

Bottonova sp. z o.o.
Robotnicza 64, 53-608 Wrocław, Poland
Tax ID: 8971606867